



Exhibit A

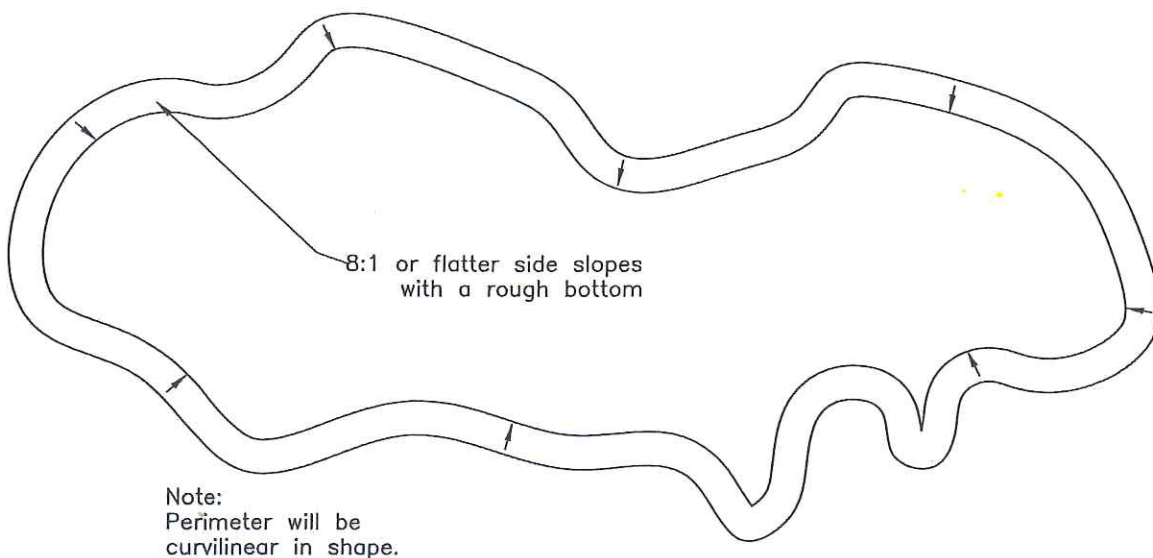

WETLAND SCRAPE PLAN VIEW

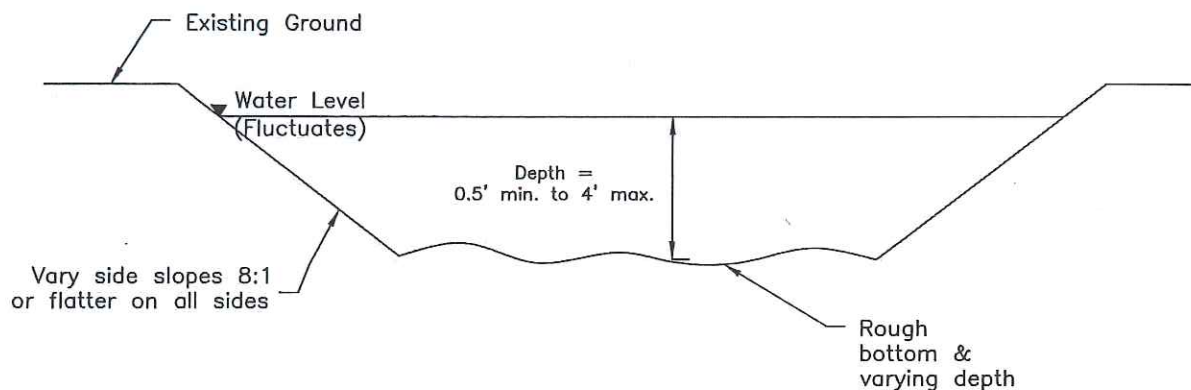

TYPICAL WETLAND SCRAPE CROSS SECTION

See Sheet _____ for the location of the scrapes

Notes:

1. Scrapes/borrow areas will be constructed at locations and as flagged by the technician.
2. Scrapes are to be irregular in shape when completed. Wheel ruts are allowed and desired.
3. Wisconsin Construction Specification 2, Excavation, shall be followed.
4. Strip minimum 6" of topsoil and stockpile it for spreading, if needed, after the excavation is completed.
5. Before topsoil is spread, the depth and slopes must be checked by the technician. Seeding shall be done as per Job Sheet 134 for Introduced Species or Job Sheet 135 for Native Species or WI Drawings WI-710 or WI-711.
6. Spoil shall be disposed of at locations approved by the technician.



Wetland Scrape/Borrow Areas

CLIENT:

City of Oconomowoc

COUNTY:

Waukesha

Designed

[Signature]

Date

10/10/18

Drawn

Checked

Alan Bann 6/4/19

Approved

[Signature] 6-4-19

Drawing Name
WI-950 A

Date
1/09

Sheet 9 of 15